

# Floor Care Maintenance



FEATURING DFT™ DAILY FLOOR TREATMENT 4515FR

## DAILY MAINTENANCE

### 1 dust mop




The first step in all floor maintenance operations is dust mopping.  
Start by scraping up any chewing gum or attached labels with a long-handled or razor scraper. Sweep around all hard-to-reach areas.  
Using a clean dust mop, sweep all loose soil into main aisle and consolidate for immediate disposal.

### 2 spot mop



All spills or tracked-in soil should be spot mopped immediately. Use a ¼ oz. per gallon solution of DFT™ Daily Floor Treatment (4515FR).

### 3 autoscrub

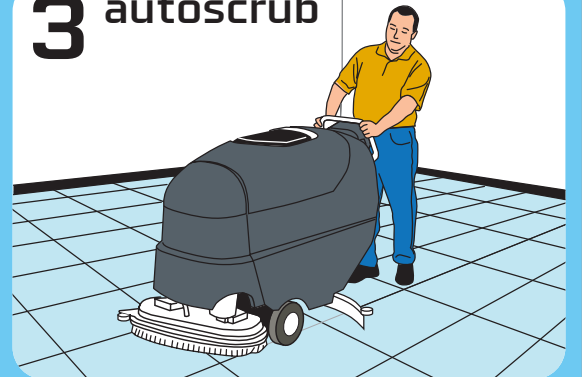

Auto scrub the floor with red pads and a ¼ oz. per gallon solution of DFT™ Daily Floor Treatment (4515FR).

For areas that are damp mopped, use a clean mop and a ¼ oz. per gallon solution of DFT™


## WEEKLY MAINTENANCE

### 1 dust mop



Weekly restoration keeps floors looking their best.  
Start by scraping up any chewing gum or attached labels with a long-handled or razor scraper. Sweep around all hard-to-reach areas.  
Using a clean dust mop, sweep all loose soil into main aisle and consolidate for immediate disposal.


### 2 autoscrub

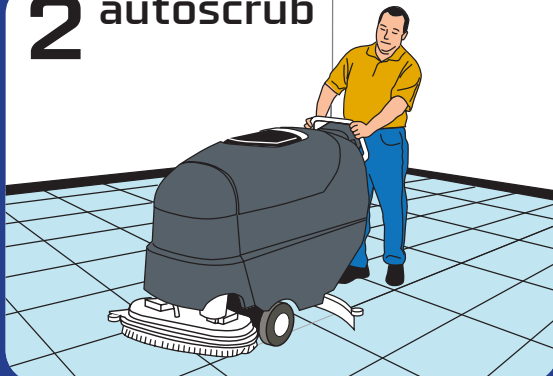

Auto scrub with red pads and a ½ oz. per gallon solution of DFT™. Pick up the trail left by the scrubber with a mop and clean, cold water.

For facilities without a scrubber use a clean mop and bucket with a ½ oz. per gallon solution of DFT™. Allow floor to dry.

### 3 high speed buff

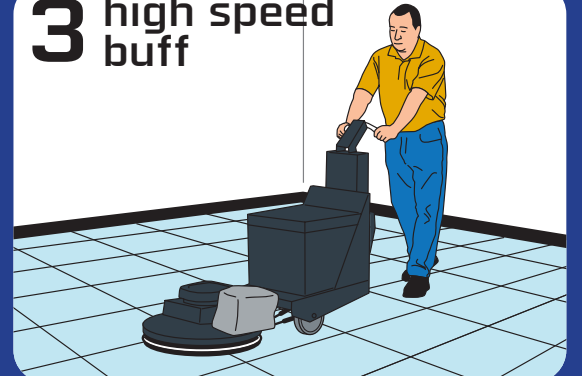

Buff the entire facility using a high speed machine and buffing pads. Turn pads often to prevent pad loading. Always dust mop after buffing.


## PERIODIC MAINTENANCE

### 1 dust mop



When floors won't respond to their original high gloss look with restoration, it's time to recoat.  
Start by scraping up any chewing gum or attached labels with a long-handled or razor scraper. Sweep around all hard-to-reach areas.  
Using a clean dust mop, sweep all loose soil into main aisle and consolidate for immediate disposal.

### 2 autoscrub

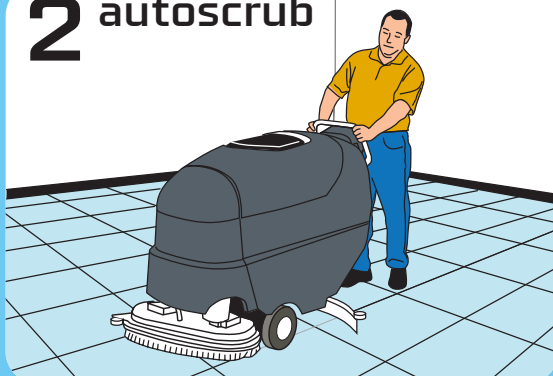

With full pad pressure, double-scrub the floor with a ½ oz. per gallon solution of DFT™ Daily Floor Treatment and blue pads. Make sure the vacuum is off and squeegees are up on the first pass. After three to five minutes dwell time, make sure the vacuum is on and the squeegees are down on the second pass. Rinse floor with clear water and let dry thoroughly.

### 3 apply finish



Using a clean finish mop and a bucket with a plastic liner, apply a coat of floor finish, staying at least 6" away from the edges. Always apply finish in thin, even coats.

If applying more than one coat of floor finish, allow at least 30 minutes dry time between coats.

## PROBLEMS & SOLUTIONS

**CONDITION:** Soiled floors; sticky, tacky floors that pick up soil.

### causes:

1. Incorrect product, dilution or application.
2. Incorrect dust mopping frequency, size and condition.
3. Incorrect size and condition of wet/finish mop.
4. Improper placement and size of matting or soiled matting.
5. Incorrect pads or soiled pads.

### solutions:

1. Use only DFT™ Daily Floor Treatment for daily cleaning and scrub and recoat. Follow restoration procedures as directed.
2. Check condition and size of dust mop.
3. Check condition and size of all wet mopping equipment.
4. Check for clean and adequate matting.
5. Use clean pads. Turn often.



Innovation is Essential.  
[www.essind.com](http://www.essind.com)

Essential Industries, Inc  
Merton, Wisconsin 53056  
(262) 538-1122 or 800.551.9679