

Floor Care Maintenance

HIGH SPEED BURNISH SYSTEM

DAILY MAINTENANCE

1 dust mop



The first step in all floor maintenance operations is dust mopping.
Start by scraping up any chewing gum or attached labels with a long-handled or razor scraper. Sweep around all hard-to-reach areas.
Using a clean dust mop, sweep all loose soil into main aisle and consolidate for immediate disposal.

2 autoscrub



Autoscrub the floor with red pads and a 1/2 oz./gal. dilution of Blue Concentrate #56 from the Emax dispenser. Pick up the trail left by the autoscrubber with a mop and bucket of clean, cold water. For hard-to-reach areas and for facilities not equipped with a scrubber, all floors must be damp mopped. Use a clean mop and a 1/2 oz./gal. solution of Blue Concentrate #56. Allow floors to dry before buffing.

3 high speed buff



Buff the entire facility using a high speed machine and buffing pads. Turn pads often to prevent pad loading. Always dust mop after buffing.


WEEKLY MAINTENANCE

1 dust mop



Weekly restoration keeps floors looking their best.
Start by scraping up any chewing gum or attached labels with a long-handled or razor scraper. Sweep around all hard-to-reach areas.
Using a clean dust mop, sweep all loose soil into main aisle and consolidate for immediate disposal.

2 autoscrub

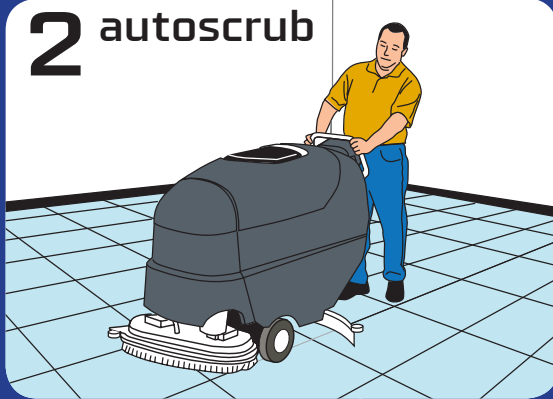

Autoscrub the floor with red pads and a 6 oz./gal. dilution of Citrus Scrub 'N Shine #12. Pick up the trail left by the autoscrubber with a mop and bucket of clean, cold water.
For facilities not equipped with a scrubber, all floors must be damp mopped. Use a clean mop and 6 oz./gal. solution of Citrus Scrub 'N Shine #12. Allow floors to dry before buffing.


3 high speed buff



Buff the entire facility using a high speed machine and buffing pads. Turn pads often to prevent pad loading. Always dust mop after buffing.


PERIODIC SCRUB & RECOAT

1 dust mop

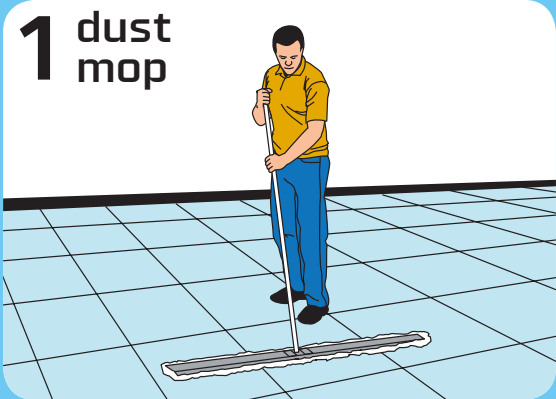

When floors won't respond to their original high gloss look with restoration, it's time to recoat.
Start by scraping up any chewing gum or attached labels with a long-handled or razor scraper. Sweep around all hard-to-reach areas.
Using a clean dust mop, sweep all loose soil into main aisle and consolidate for immediate disposal.

2 autoscrub

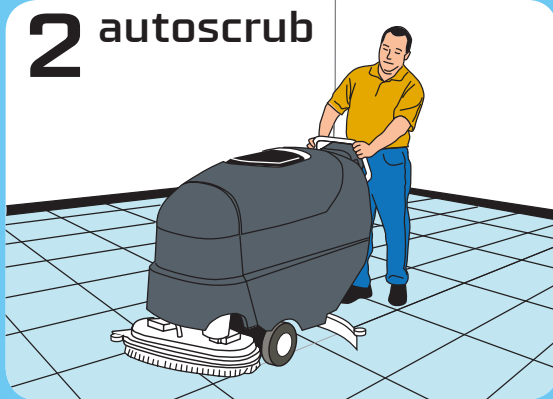

With full pad pressure, double-scrub the floor with an 2 oz./gal (1:16) solution of Blue Concentrate #56 from the Emax dispenser and blue pads. Make sure the vacuum is off and squeegees are up on the first pass. After three to five minutes dwell time, make sure the vacuum is on and the squeegees are down on the second pass. Rinse floor with clear water and let dry thoroughly.

3 apply finish



Using a clean microfiber finish mop and a KaiMotion™ bucket, apply a coat of floor finish, staying at least 6" away from the edges.
Always apply finish in thin, even coats. Let dry at least 30 minutes. If desired, apply an additional coat of floor finish.

PROBLEMS & SOLUTIONS

CONDITION: Soiled floors; sticky, tacky floors that pick up soil.

causes:

1. Incorrect product, dilution or application.
2. Incorrect dust mopping frequency, size and condition.
3. Incorrect size and condition of wet/finish mop.
4. Improper placement and size of matting or soiled matting.
5. Incorrect pads or soiled pads.

solutions:

1. Use only Blue Concentrate #56 for daily cleaning and scrub and recoat. Follow restoration procedures as directed.
2. Check condition and size of dust mop.
3. Check condition and size of all wet mopping equipment.
4. Check for clean and adequate matting.
5. Use clean pads. Turn often.



Innovation is Essential.
www.essind.com

Essential Industries, Inc
Merton, Wisconsin 53056
(262) 538-1122 or 800.551.9679