## What Our Customers Say

# Performance Floor Coating Green S201FF Finish

"I had tried no less than four previous floor finishes that claimed to be 'Green.' While they may have been, the performance lacked in one or more areas with each different product. All of these issues do not present themselves with G2 Green Finish. I have been more than pleased with the results of G2 Green Finish, so much, that after an initial trial run at one school, we now use the finish in all 87 of our schools."

**Brian L. Hoover, Custodial Services Supervisor** Loudoun County Public Schools – Leesburg, VA

"Montgomery County Public Schools has been using G2
Green Finish and Green Strip for over three years. We have
been satisfied with the quality of performance and plan to
continue using these products in the future."

Larry Hurd, Building Service Trainer
Montgomery County Public Schools – Rockville, MD

"We decided to implement Essential G2 and Green Strip throughout our district into thirty sites. Our Superintendent of Schools, Facilities Supervisors and many other personnel are amazed at the overall appearance of our sites with special admiration for the gloss of our floors."

Michael N. Preston, Assistant in Facilities/Operations
Brian Rimel, Assistant in Facilities/Operations
Cecil County Public Schools – Northeast, MD

"We implemented Essential Industries G2 Green Finish over four years ago. We have been very pleased with the overall product performance. G2 maintains a high gloss appearance that all occupants and visitors appreciate, and it responds well to dry burnishing. Due to the quality of this product, this program has been rolled out to all 230 schools within the school district."

E. P. Dent, Building Supervisor VI
Eleanor Roosevelt High School – Greenbelt, MD





Scan the QR code to find out how you can brand this great product with your name and logo!

#### Customer Support

We believe in providing our customers with the best of training. Essential Industries offers the following materials to assist you in successfully finishing and maintaining your floors.

#### Floor Care Manual

Bilingual step-by-step walk-through, from start to finish.

#### **Product Spec Sheets**

Product specific list of features and properties.

#### **Wall Charts**

Illustrated charts to post on the wall, ensuring everyone knows the proper techniques for caring for your floors.

#### **Videos**

Visually learn from our experts.

#### **Product Demonstrations**

FREE product demonstrations with hands-on experience.

Scan this QR code to learn more about G2 Green Finish





Merton, Wisconsin 53056-0012 Ph: 262.538.1122 or 800.551.9679 www.essind.com



Excellence In Environmentally Responsible



Floor Care





### Superior Floor Care with Less Environmental Impact

- Environmentally-responsible, yet performs equal to or better than a standard floor finish
- · Combines deep gloss, high durability and ease-of-use into one product
- Non-yellowing, low maintenance formula offers excellent black mark and scuff resistance
- Use on vinyl, linoleum, terrazzo, quarry tile, laminate wood and sealed concrete floors
- · Contains no added butyl, harsh alkalies, zinc, phthalates or APEO surfactants
- Low odor low ammonia
- Low 1.0% VOC content meets CARB requirements
- Ideal for limited maintenance programs, yet responds to burnishing, if desired
- Perfect for classrooms, patient rooms, offices and retail establishments
- Exceptionally fast dry time 20 minutes under normal conditions
- Slip-resistant UL-classified
- Green Seal<sup>™</sup> GS-40 certified

#### Gloss and Black Heel Marking Comparison


	Essential Industries G2 Green Finish	Leading Competitive Green Finish
Solids	20%	18%
Gloss - 1st Coat	30%	32%
Gloss - 2nd Coat	56%	54%
Gloss - 3rd Coat	71%	68%
Gloss - 4th Coat	81%	72%
BHMR*	18	42

\*BHMM (Black Heel Mark Resistance) is a Snell Capsule test. White vinyl composition tiles are given two coats of finish with a 30-minute dry time between coats and a 60-minute dry time after the second coat. The tiles are put into a Snell Capsule, which is a tumbling device, and rotated for five minutes. Inside the Snell Capsule are a number of black rubber cubes that simulate foot traffic. This enables us to measure the BHMR of a finish. The number represents the number of black marks present on the tile.

"G2 Green Finish was applied to a busy hallway. Even with limited maintenance - no auto-scrubbing or burnishing, just damp mopping - the hallway is not attracting black marks or soil. It looks incredible."

Southeastern Wisconsin Grade School

#### Floor Safety Profile

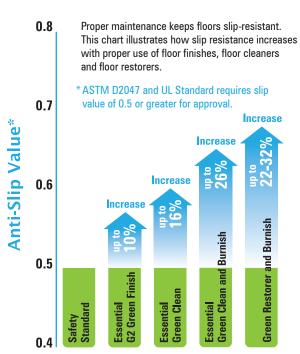

Floor Care Products Used

#### **Slip Resistance**

- Every floor finish we supply is slip-tested to conform to ASTM D2047 standards.
- Underwriters Laboratories (UL) slip resistance classification provides a comprehensive floor care system under which applicable products are slip-tested, including: Finishes, Restorers, and Cleaners.

#### **Slip and Fall Support**

- Essential's floor care experts have a lifetime of experience helping customers with unique floor challenges. Contact us for more information.
- Essential can provide documentation that a given product has been classified slip-resistant by Underwriters Laboratories.
- Slip resistance information for our products is available on the web.

